

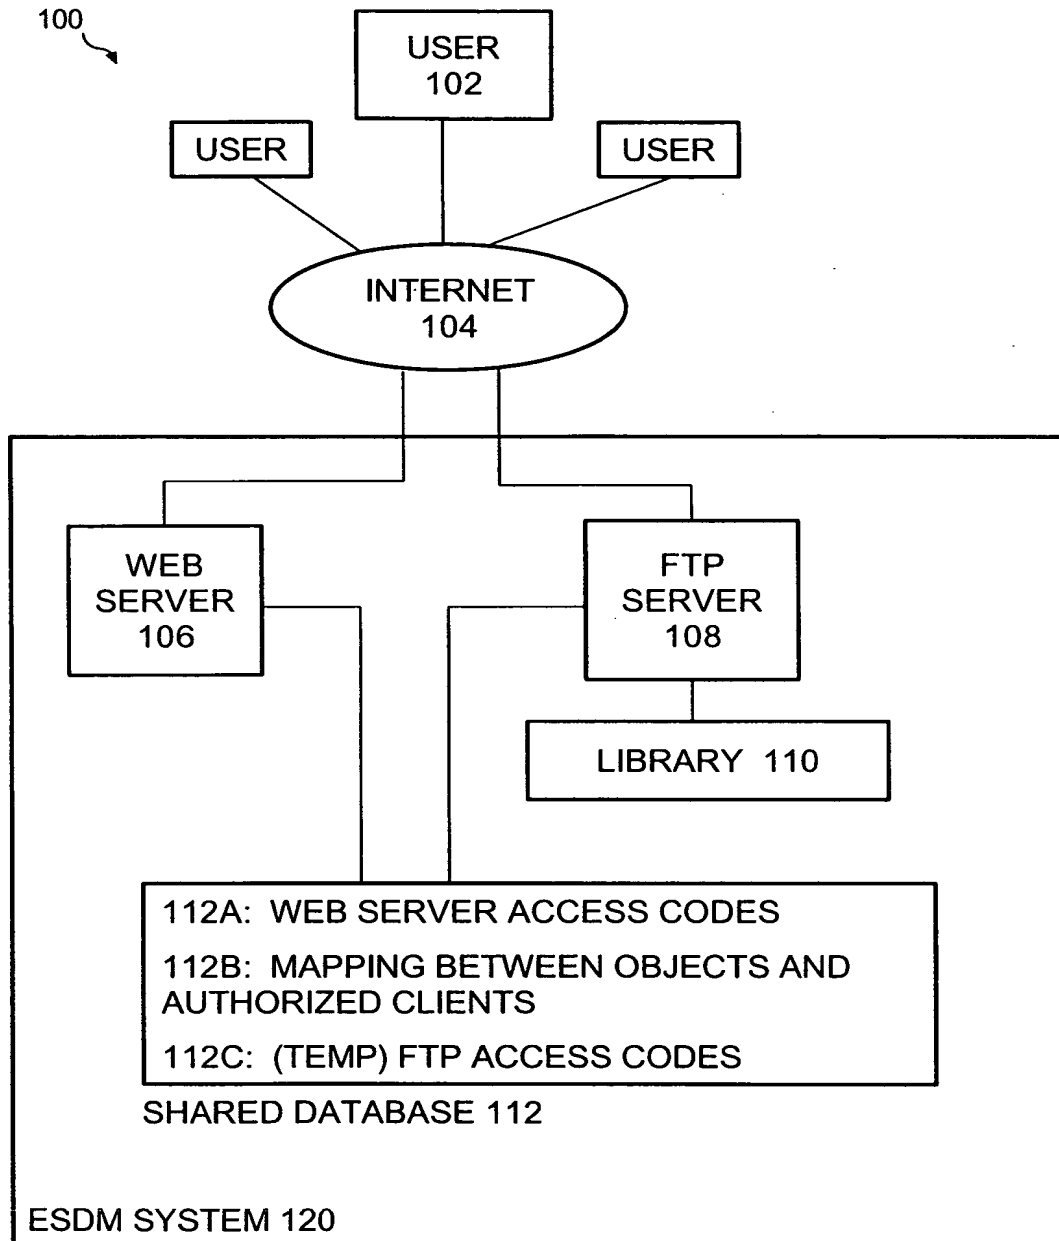


**FIG 1**

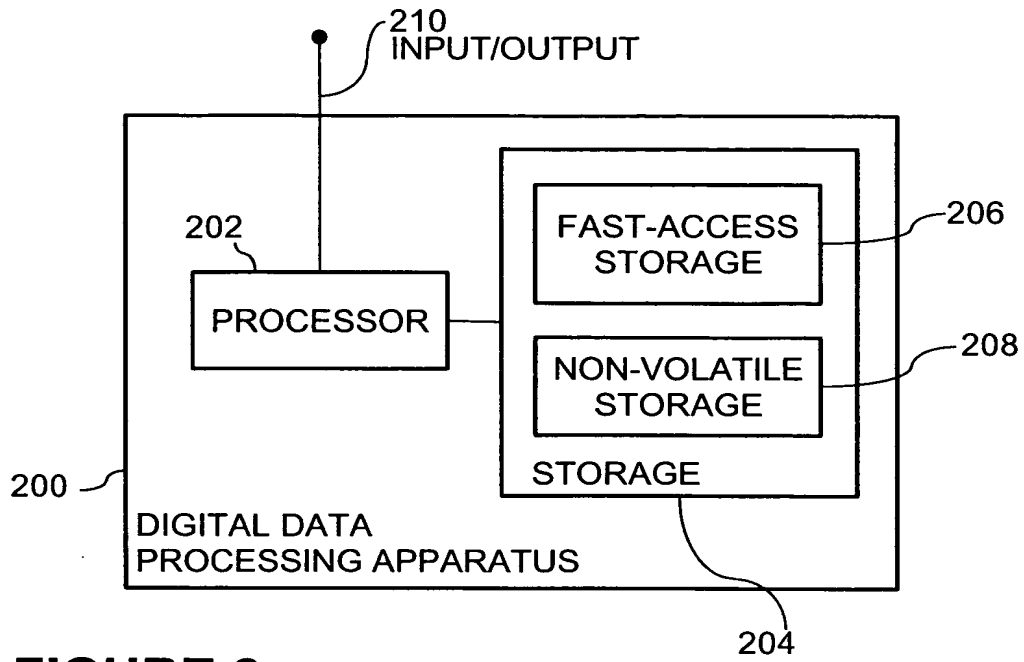


**FIGURE 2**

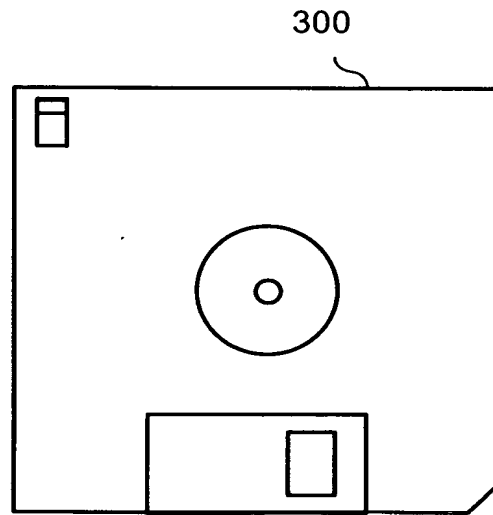


**FIGURE 3**

**FIG 4**

400

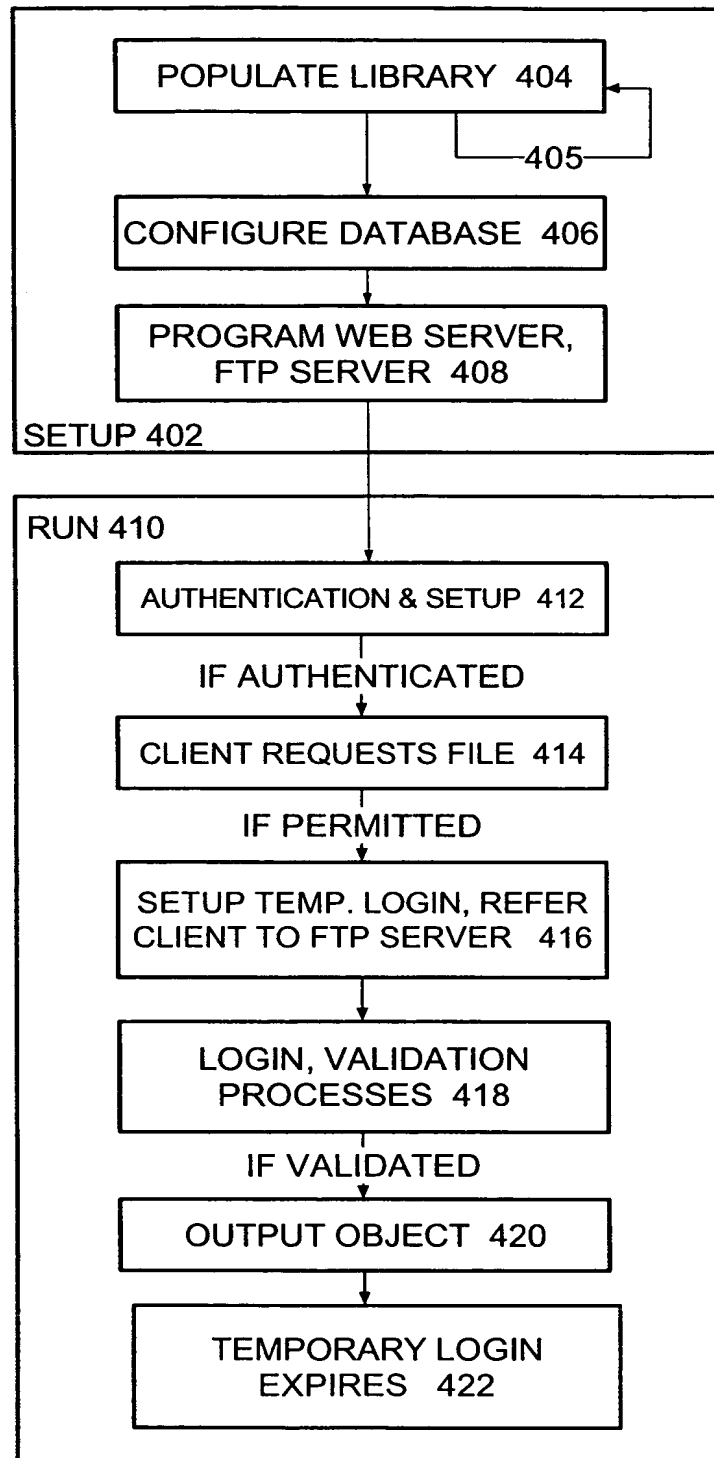

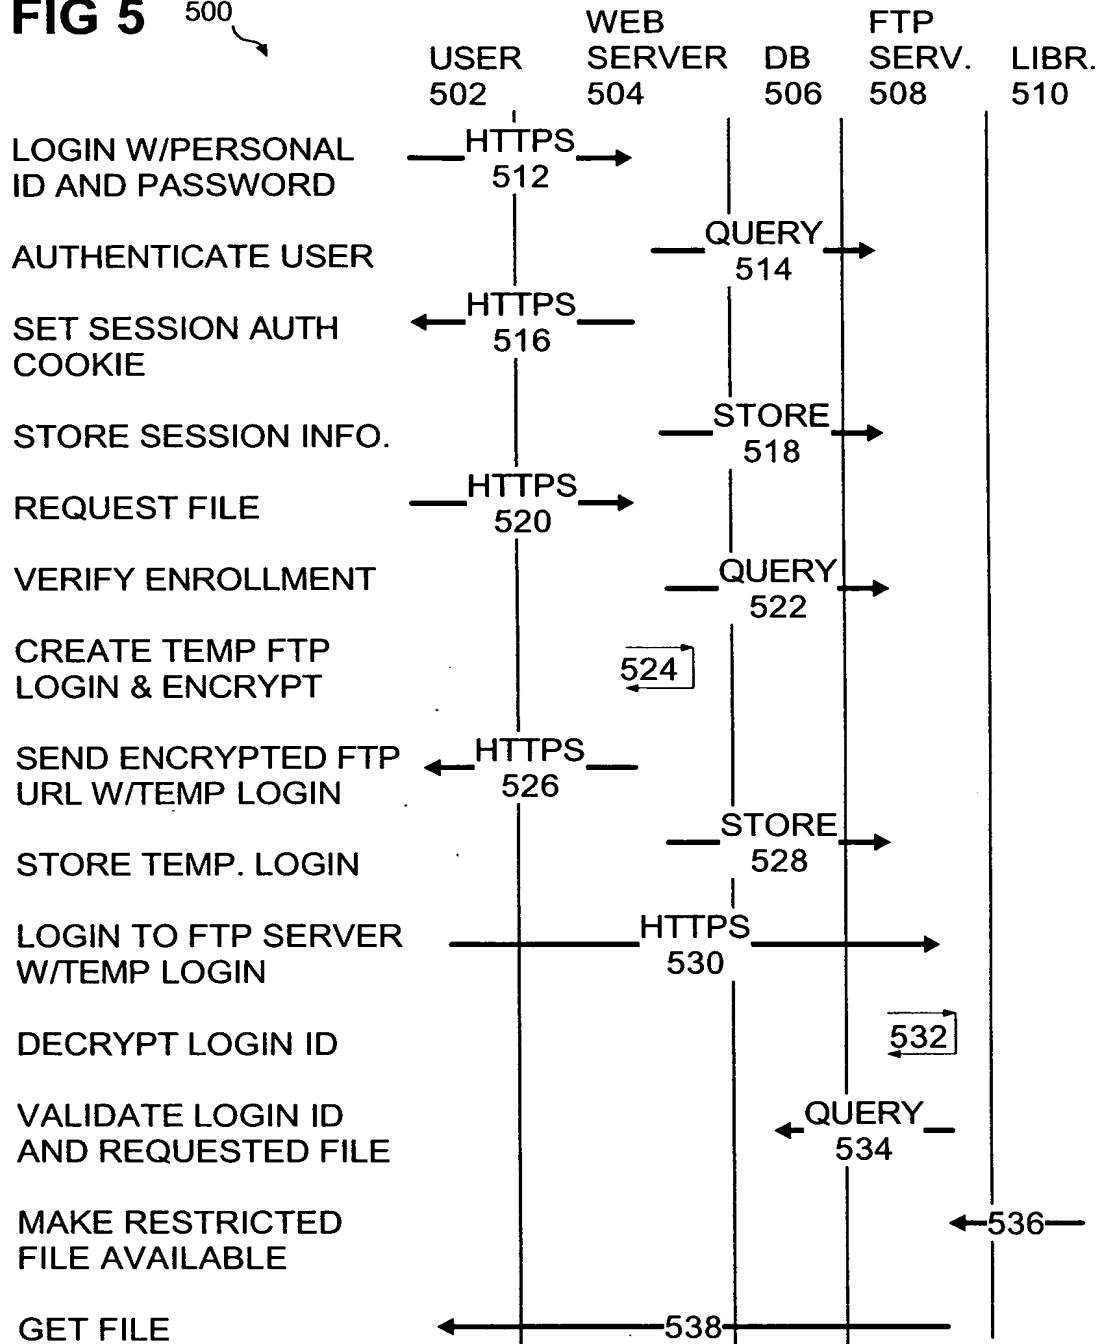**FIG 5** 500

**FIG 6**

600

<b>DATABASE ENTRY COMPONENT</b>	<b>MEANING</b>
ftp_req_id 602 (FTP Request ID)	The primary key of the record; an auto-incrementing value used to generate unique user ids for the FTP server.
img_key_id 604 (Image Key ID)	An internal database ID used to identify the file that is to be made available for download by the FTP server.
file_nm 606 (File Name)	Name of the file described by the img_key_id.
cre_dtm 608 (Create Date/Timestamp)	Used for audit purposes to track when the request record was created.
exp_dtm 610 (Expiration Date/ Timestamp)	Sets the time at which the request may no longer be used. Authentication requests after this point in time are denied.
ct_id 612 (Contact Identifier)	Unique identifier of the individual authorized to download.
party_id 614 (Party Identifier)	Unique identifier of the account of which the contact is a member.
encrypt_ind 616 (Encryption Indicator)	Indicates to the FTP server whether or not to deliver an encrypted version of the file.
dnld_id 618 (Download Identifier)	A reference to another database table used for managing the software entitlements available to individuals and their associated accounts.
pswd_val 620 (Password Value)	System generated password required for temporary FTP user represented by this database record.